


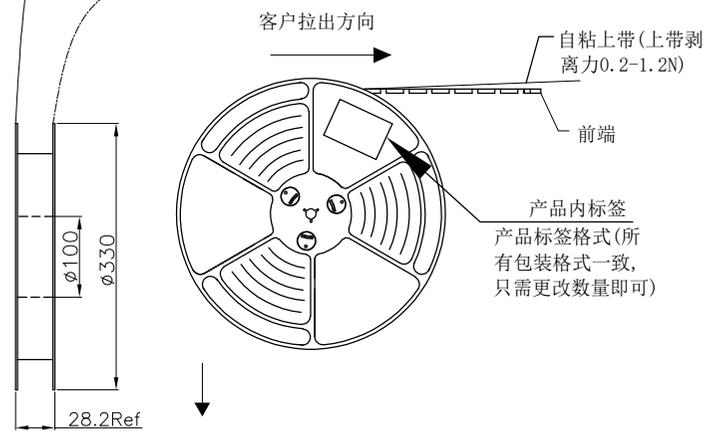
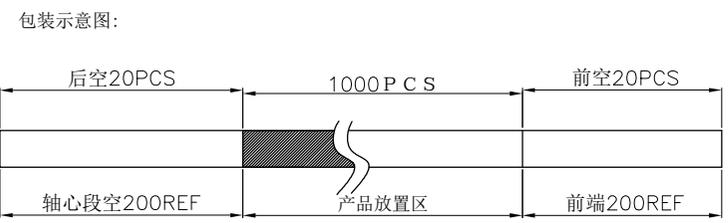
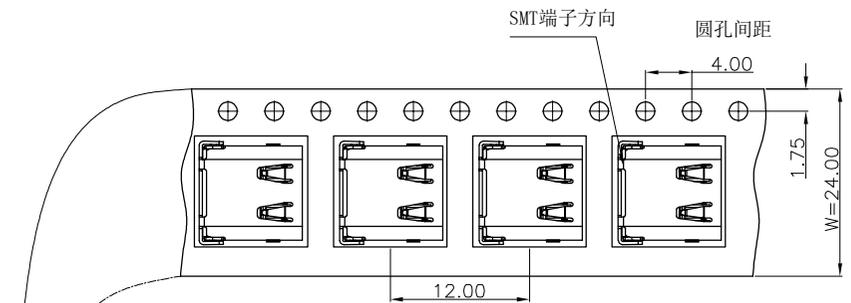


REV	DESCRIPTION	DATE	APPROVED
AO	NEW	2021.11.26	SYJ

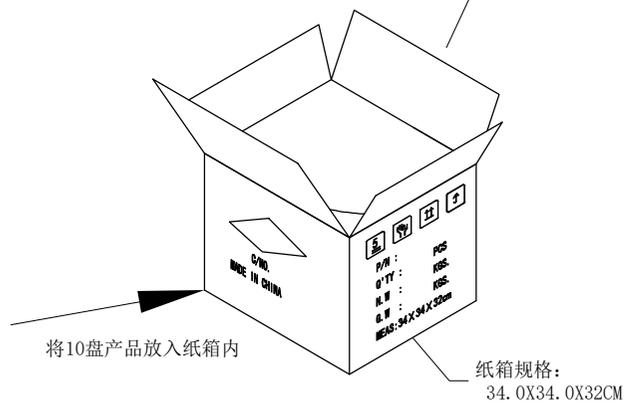

- 备注:
- 1.把上下载带送入载带机进行调整,然后将产品按照指定的方式摆入下载带中,开动卷带机进行卷装(每卷包1000PCS),卷装完成后需用上带缠绕最少20CM;
 - 2.在卷装OK的每卷盘面的指定位置上贴上物料和RoHS标签装入纸箱内;每箱装10盘
 - 3.纸箱用封箱带将其封好,胶带要求工字型,不可遮住标签;
 - 4.如果客户对包装标签另有要求,请按客户要求作业;有未满之零数箱需用缓冲材料填充;
 - 5.上载带剥离力0.2-1.2N.

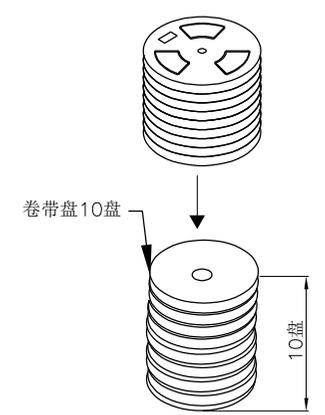

TOLERANCE SIZE	TITLE	DIANWEI		DRAW:	
X. ± 0.35	2.30AX系列Type-C 24P	东莞市钿威电子科技有限公司		(设计)	
.X ± 0.30	前插后贴板上型(有弹片)	DONGGUAN DIANWEI ELECTRONIC TECHNOLOGY CO., LTD		SYJ	
.XX ± 0.25	PART NO.	2.30A0.024200		CHECK:	
.XXX ± 0.15	DWG NAME.			(审核)	
X. ± 5'	UNITS:	MM	SCALE:	1:1	SIZE:
.X ± 3'	SCALE:	1:1	SIZE:	A4	SHEET:
.XX ± 1'	SIZE:	A4	SHEET:	2/2	PROJECTION:
	PROJECTION:			REV:	AO
	REV:	APPD:		(核准)	